



Water Coolers



M8SBEE shown

BARRIER-FREE MODULAR M8SBEE, M8SBPM

Models

M8SBEE produces a light beam that is reflected off the user to automatically start water flowing. If user does not move away within 30 seconds, water shuts off automatically.

M8SBPM operates when the mechanical push button is depressed. Water continues to flow as long as the button is depressed.

When these coolers are properly installed, they allow your facility to comply with ADA requirements.

Standard Features

- > Waterways are Lead-Free in Materials & Construction
- > Stainless Steel Surfaces
- > Heavy-gauge galvanized steel wall mounting frame
- > High efficiency cooling tank and coil
- > Refrigerant R-134a
- > Product Certified to NSF/ANSI Standard 61, Annex G (AB1953)
- > Limited 5-Year Warranty

Finishes

- > Standard Finish: Stainless Steel
- > Optional Finish at extra cost: Regency Bronze

Installation

- > Prior to roughing-in, consult local, state and federal codes for proper mounting height.
- > Wall mounting frame is furnished for easy installation



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty: One year on sealed refrigeration system and most components parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of $\leq 0.25\%$) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Drinking water coolers shall comply with ANSI A117.1-1992 and ADA frontal approach requirements. Cooling unit RLF8 for Model M8SBEE and M8SBPM complies with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.




Certified to NSF/ANSI 61-G

Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot 'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Cooling Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
M8SBEE	8.0	8.0	No	No	1/5	4.8	340	No	Yes	114 Lbs.
M8SBPM	8.0	8.0	No	No	1/5	4.6	340	No	Yes	114 Lbs.

*Industry Standard Rating Condition 80° F inlet water temperature.

Specifications subject to change without notice

OASIS™ BARRIER-FREE MODULAR WATER COOLER MODELS M8SBEE, M8SBPM

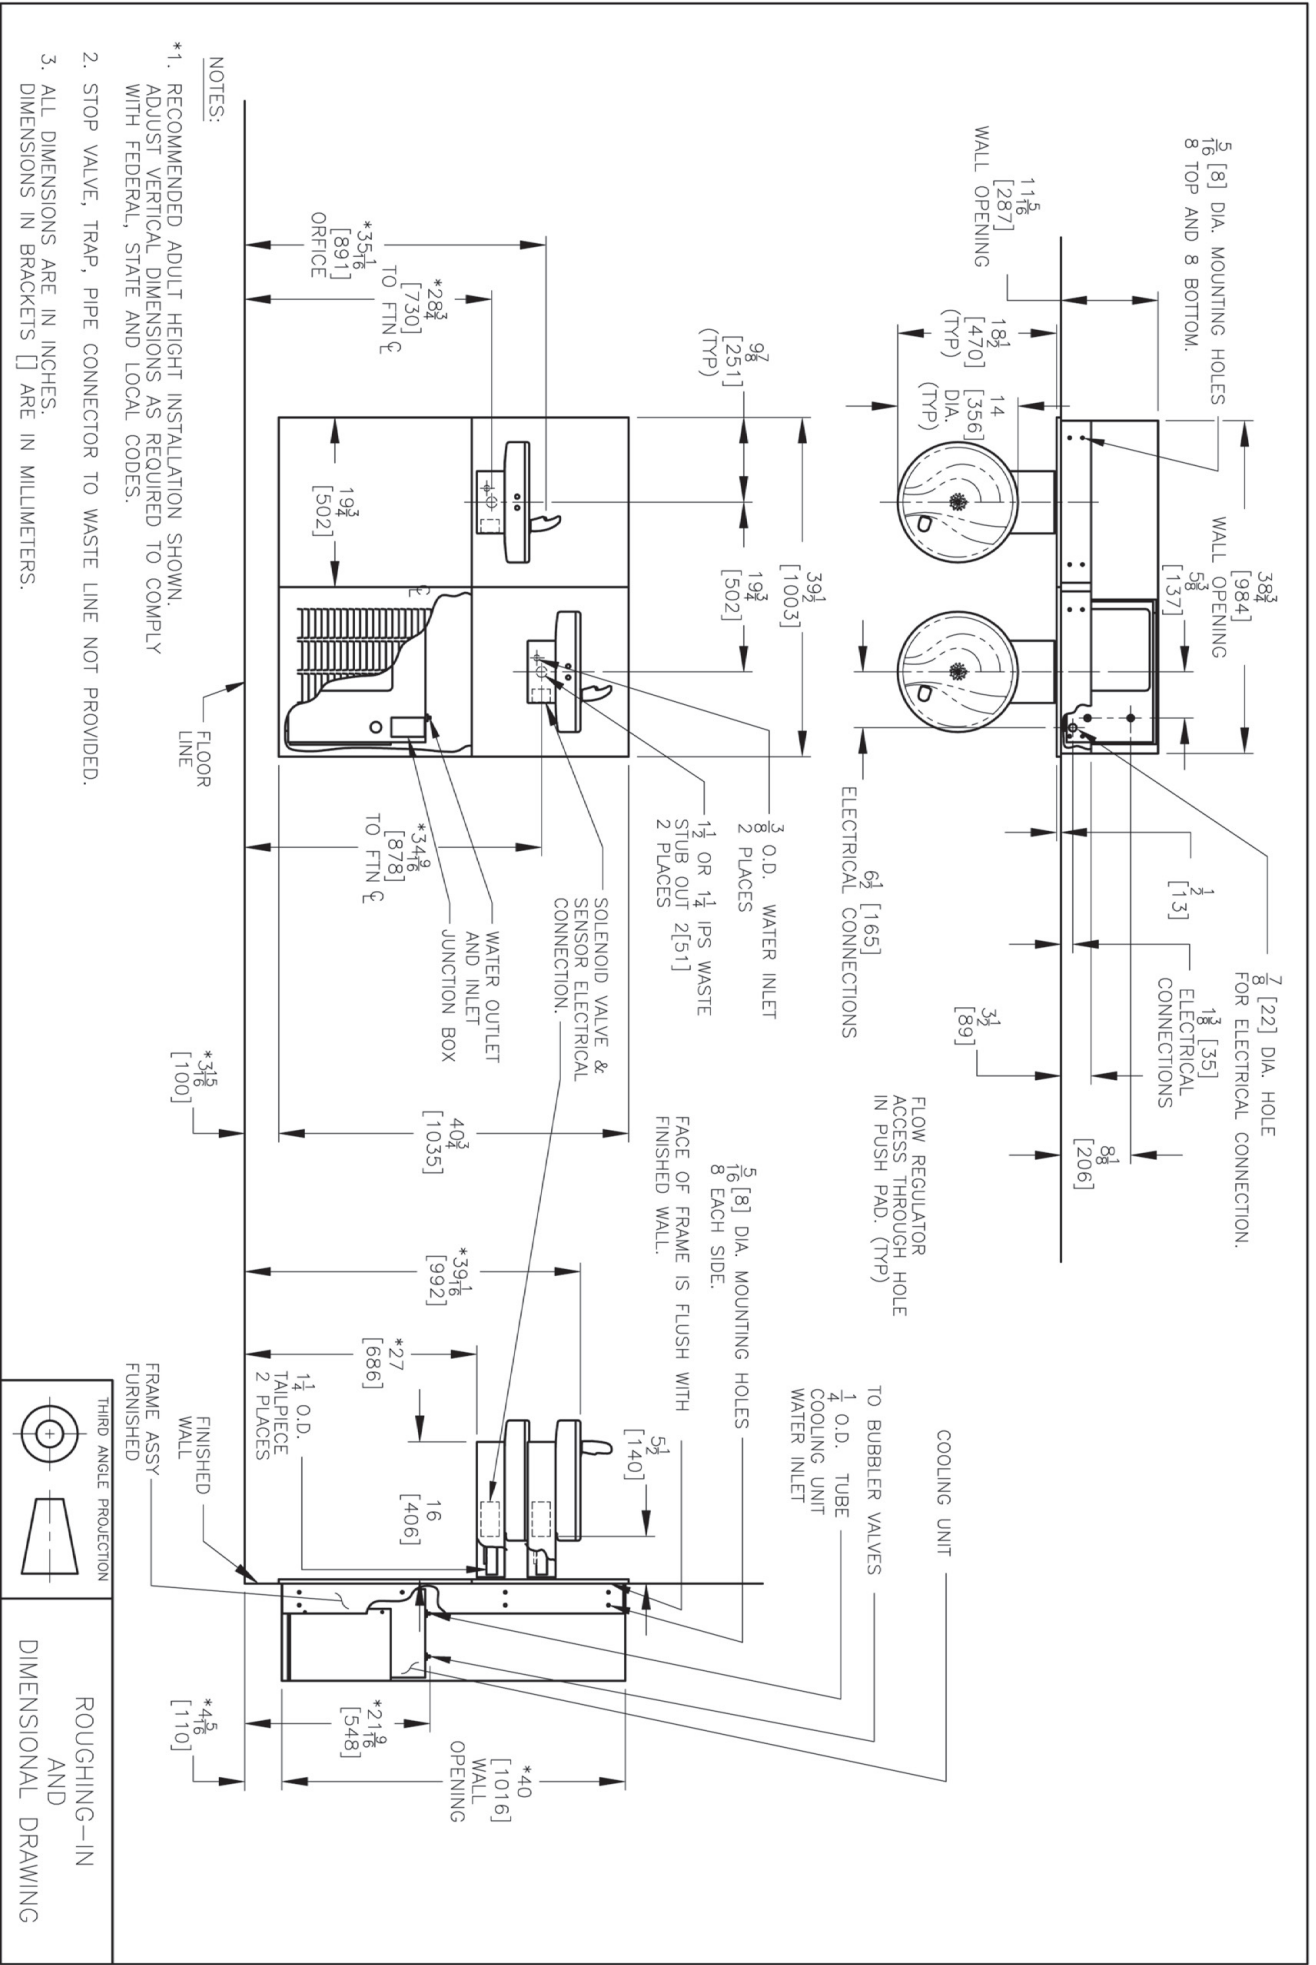

NOTES:

- RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
- STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE NOT PROVIDED.
- ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

